
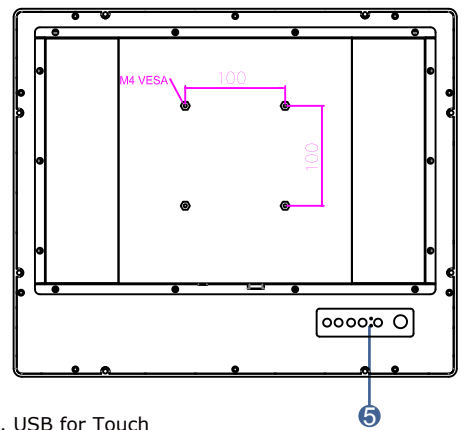


19" GC65 Display (Standard I/O) - R19L100-GCM1

Features

- 19" 1280 x 1024 Resolution
- VGA input and HDMI input
- Projected Capacitive Multi-Touch
- Front IP65 for protection against water and dust

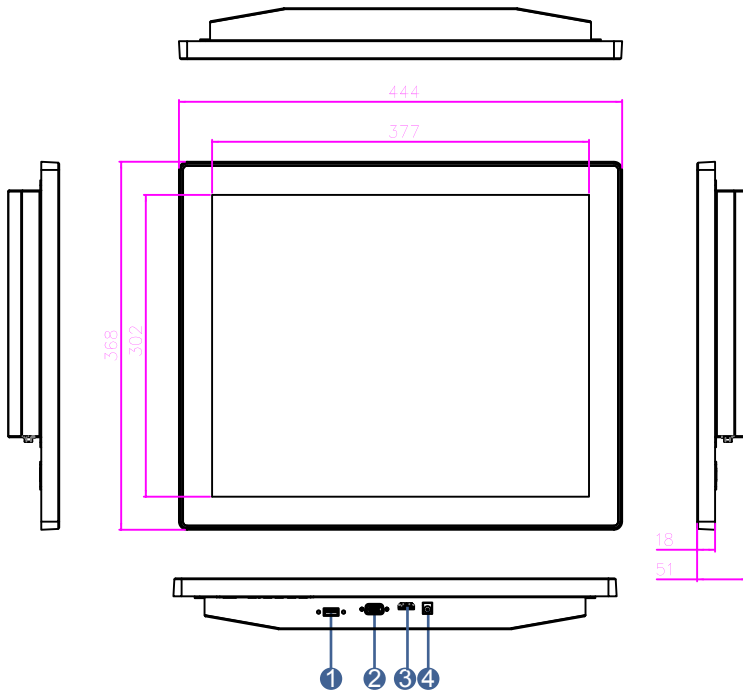

1. USB for Touch
2. VGA
3. HDMI
4. 12V DC in
5. OSD

Specifications

Display Spec :

- Size/Type : 19" TFT
- Resolutions : 1280x1024
- Brightness : 250cd/m² (typ.)
- Contrast Ratio : 1000 : 1 (typ.)
- Viewing Angle : -85~85(H); -80~80(V)
- Max Colors : 16.7M
- Touch : Projective Capacitive Touch

Power Specification :

- Power Input : 12V DC 2.5mm, with External AC to DC Adapter, comply with Level V1 efficiency standard
- Power Consumption : 15W typical, normal operation

Environment Considerations :

- Operating Temperature : 0 °C to 50 °C
- Operating Humidity : 10% to 90% (non-condensing)
- IP Rating : Front IP65

Input Specifications :

- Input Ports : 1 x VGA
1 x HDMI
- OSD Membrane : 5 keys (+, -, power, Esc, Enter)

Mechanical Specification :

- Mounting : VESA Mount (100 x 100 mm) ; Panel Mount
- Dimensions (W x H x D) : 444 x 368 x 51 (mm)

Product Accessory :

- Accessory : 12V DC in Adapter
HDMI cable
VGA cable
USB cable for touch