

MOUSE 1

The washable MOUSE 1 specially made for healthcare environments where hygiene is a priority. Its sealed and IP68 waterproof design makes it possible to clean and disinfect without compromising performance. This mouse offers protection against dirt, dust, and liquids, ensuring a clean work environment – perfect for hospitals, labs, and clinics.



Ergonomic Design

White, easy-to-handle exterior designed for comfort during extended use. The contoured, rounded shape fits naturally in either hand, supporting a relaxed grip and reducing fatigue over long periods. Ideal for both right- and left-handed users.




IP68 Waterproof

Sealed design to protect against dust, dirt, and liquid ingress, making it suitable for even the most demanding environments.



Mechanical Buttons and Scroll Wheel

Enjoy precise control with left and right mechanical buttons, and a responsive scroll wheel that supports up/down scrolling and middle-click functionality.

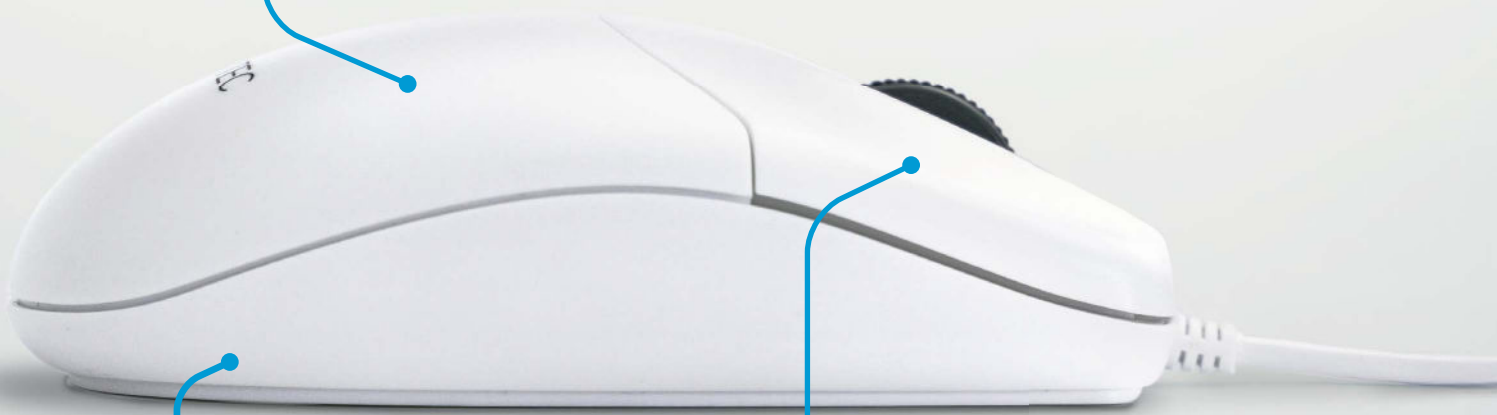

Washable Mouse

Fully washable and disinfectable for optimal hygiene. Built to withstand frequent cleaning with common disinfectants used in medical environments, ensuring lasting performance and safety.



High Precision Tracking

1000 DPI optical sensor for accurate, smooth movement on a variety of surfaces. Performs reliably even on challenging materials commonly found in medical settings, enabling precise control where it matters most.



USB Connection or wireless

Plug-and-play connectivity for seamless integration with any computer. Available in both wired and wireless versions to suit your workflow – simple setup with maximum compatibility.

Specifications MOUSE 1

Product features

Protection	IP68
Max. resolution	1000 dpi
Connection	Wired (USB) – cabel length: 1400 mm / Wireless
Color	White
Compatibility	All operating systems supporting USB mice
Number of buttons	2 mouse keys and 1 scroll wheel

Technical specifications

Weight	55 g
Dimensions (W × D × H)	115 × 61,6 × 36 mm
Storage temperature	-20 °C to 70 °C
Operating temperature	0 °C to 50 °C
Input voltage range	5 V (DC) ± 5 %
Max current consumption	50 mA
Approval and compliance	CE
Warranty	24 months



ClIQ Technology GmbH
 Absberggasse 27/7.3
 1100 Vienna
 Austria

www.cliqtec.eu
office@cliqtec.eu
 +43 650 680 33 94