



Features

- Intel® Meteor Lake-H Core™ Ultra 7/5 Processor
- 2 x 262-pin SODIMM socket Max. up to 64GB DDR5 5600MT/s
- Rich I/O, 4-USB3.2, 2-USB2.0, 1-DP, 2-HDMI, 2-COM, 2-LAN, 1-8bit GPIO
- Support 5G (Sub-6G) module, M.2 NVMe SSD Gen4 x 4
- Fanless operation Temperature from -40°C ~ 50°C
- CE, FCC Class B, IP50
- Wide range DC power input from +9 ~ 36V
- Support HW TPM 2.0



Modular Design



5G/ Wi-Fi 6E Available



Vibration/ Shock 2G/55G



WT -40-50°C



Wide-DC Input 9-36Vdc

Specifications

System Information

Processor	Meteor Lake-H Intel® Core™ Ultra 7 Processor Intel® Core™ Ultra 5 Processor
System Memory	2 x 262-pin SODIMM socket Max. up to 64GB DDR5 5600 MT/s
BIOS Information	AMI uEFI BIOS 256 Mbit SPI Flash ROM
Watchdog Timer	H/W Reset, 1sec. ~ 65535sec.
H/W Status Monitor	CPU & system temperature monitoring and Voltages monitoring
TPM	dTPM 2.0
iAMT	Selected SKUs
SBC	EMS-MTH

Expansion

M.2	1 x M.2 Key-B 2242/3042/3052 support SATA3 / PCIe Gen4x1/ USB3.2 Gen2 and SIM slot1(internal) 1 x M.2 Key-E 2230 for Wi-Fi & BT Module(USB2.0 / PCIe Gen4x1)
IET	1 x IET interface (1 x DDI, 4 x PCIe Gen4x1, 3 x USB2.0, 1 x SMBus, eSPI)

Storage

M.2	1 x M.2 Key-M 2280 (1 x PCIe Gen4x4), support NVMe 1 x M.2 Key-B 2242, support SATA (share with expansion slot)
-----	--

Front I/O

Power Button	1 x Push Button for Power on/off
Reset Button	1 x Push Button for Reset
LED Indicator	1 x Power LED (Blue) 1 x Storage LED (Yellow) 1 x LTE LED (Green) 1 x Wifi LED (Green)
USB	2 x USB2.0
COM Port	2 x COM RS232/422/485 (BIOS & Jumper)
Digital I/O	1 x 8-bit GPIO (DB9)
SIM Slot	1 x Internal SIM slot
Wire-Control Power On/Off	1 x 2-Pin Terminal Block
Antenna	2 x Antenna with dust cover

Rear I/O

USB	4 x USB 3.2 Gen.1 (5Gbps)(w/ USB 2.0)
LAN Port	2 x RJ-45
Audio	1 x Mic-In, 1 x Line-Out
DP	1 x DP++1.4
HDMI	2 x HDMI 2.0b
Antenna	2 x Antenna with dust cover
AC/DC Input	1 x 3-Pin Terminal Block (V+, V-, GND)

Right I/O

Antenna	2 x Antenna with dust cover
---------	-----------------------------

Left I/O

Antenna	2 x Antenna with dust cover
---------	-----------------------------

Display

Graphic Chipset	Xe LPG Graphics
Resolution	DP++ 1.4: 4096x2304 @ 60Hz HDMI 2.0b : Max. resolution 4096x2304 @ 60Hz

Audio

Audio Codec	Realtek ALC888S HD codec
-------------	--------------------------

Ethernet

LAN Chipset	2 x Intel I226-IT
Specification	2 x 10/100/1000/2.5G GbE compatible

Power Requirement

Voltage Input Spec.	DC in typical 12/24V (+9V ~ +36V), wide voltage single power input TVS component for surge protection Reverse current/voltage protection(Max. Currency: 13A)
---------------------	--

Voltage Input Connector	3-Pin Terminal Block
-------------------------	----------------------

ACPI	Single power ATX Support S0, S3, S4, S5 ACPI 5.0 Compliant
------	---

Power Mode	AT/ATX (ATX is default setting)
------------	---------------------------------

Software Support

OS	Win 10 / Win 11/ Linux
----	------------------------


Certification

Certification Information	CE, FCC Class B
---------------------------	-----------------

Mechanical & Environmental

Operating Temp.	-40°C ~ 50°C (w/SSD) ambient w/ air flow
Storage Temp.	-30°C ~ 70°C (-22°F ~ 158°F)
Operating Humidity	40°C @ 95% Relative Humidity, Non-condensing
Dimension (W x L x H)	240mm x 150mm x 59 mm (Standard) 240mm x 150mm x 85 mm (w/ IET module)
Weight	2.3 kg (System) 3.1 kg (w_ Package)
Vibration Test	With SSD : 2Grms, IEC 60068-2-64, Random, 5 ~ 500Hz, 0.5hr/axis
Shock Test	With SSD : 55Grms, IEC 60068-2-27, Half Sine, 11ms
IP Rating	IP 50
Mounting Kit	Wall mount kit (standard) DIN RAIL (optional)

Mechanical Drawing

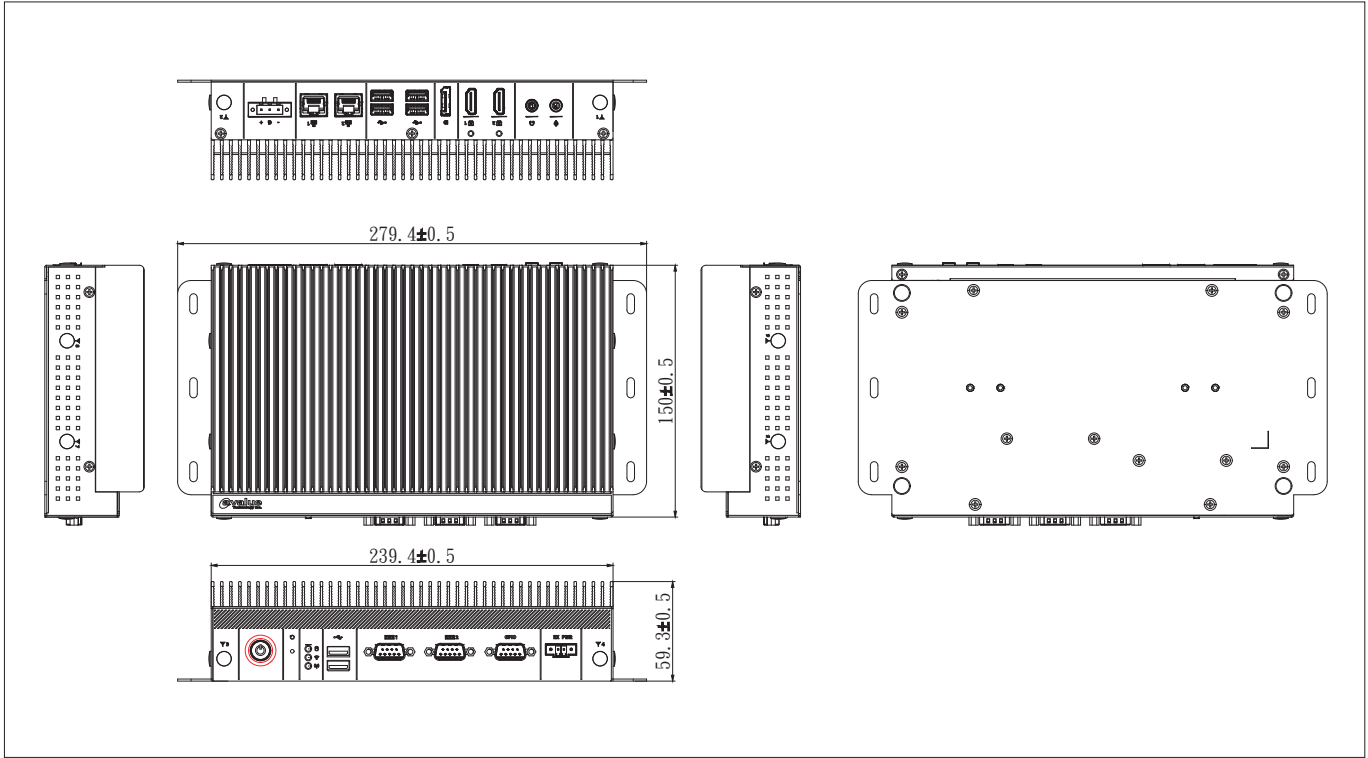

Ordering Information

P/N	Processor	Memory	Storage	Adapter/ PSU	Mounting Kit	Temp.
EMS-MTH-U7-A1-1R	Intel® Core™ Ultra 7 Processor 155H	8GB DDR5 (Up to 64G Optional)	(Optional)	120W Adapter (Optional)	Wall Mount (Din Rail Optional)	-40°C ~ 50°C
EMS-MTH-U5-A1-1R	Intel® Core™ Ultra 5 Processor 125H	8GB DDR5 (Up to 64G Optional)	(Optional)	120W Adapter (Optional)	Wall Mount (Din Rail Optional)	-40°C ~ 50°C
EMS-MTH-U7E-A1-1R (By Project)	Intel® Core™ Ultra 7 Processor 165H	8GB DDR5 (Up to 64G Optional)	(Optional)	120W Adapter (Optional)	Wall Mount (Din Rail Optional)	-40°C ~ 50°C
EMS-MTH-U5E-A1-1R (By Project)	Intel® Core™ Ultra 5 Processor 135H	8GB DDR5 (Up to 64G Optional)	(Optional)	120W Adapter (Optional)	Wall Mount (Din Rail Optional)	-40°C ~ 50°C

Packing List

Item	Quantity
Intel® Meteor Lake-H Core™ Ultra 7/5 Processor Fanless Rugged Embedded System	1
Terminal block to lockable DC Jack cable	1
DP to VGA converter	1
Wire tie for HDMI	2
Screw kits for peripheral	1
Thermal pad kits for memory and M.2 NVMe SSD	1

Optional Items

Item	P/N
AC/DC adapter 12V/10A 90 Screw Type	ACC-ADP-120N-07R
Power Cord 3P (F)-3P (M) 183cm, USA type	E1702031833R
Power Cord SL-6+SL-3 183cm, EU type	E1702031000R
Power Cord 3P (F)-3P (M) 183cm, Japan w/PSE type	E1702031834R
Power Cord QP-026+SL-3 183cm, UK type	E170P060380R
Power Cord 3P (F)-3P (M) 183cm, Australia type	E1702031831R
Din Rail Kit	ACC-EMS-DIN-01R

I/O Overview

